




+400°C | +752°F



-50°F | -58°F

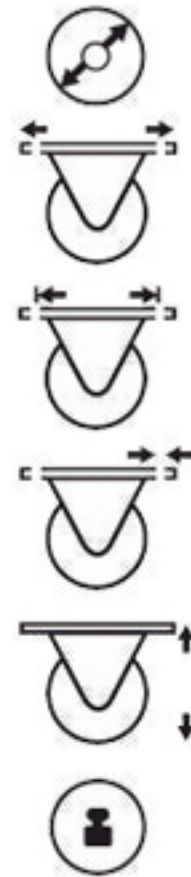

100 mm | 4"

100 x 85 mm | 4" x 3-11/32"

80 x 60 mm | 3-7/16" x 2-3/8"

9 mm | 3/8"

131 mm | 5-1/8"

250 Kg | 550 Lbs



XFZ100

XFZ100BR

XFZ100BT

XFZ100C



ZINC
Ditherm XTW

Complete castor codes with different types of hubs | Código de rotantes completo con diferentes tipos de cubos

Code de roulettes complete avec différents types de moyeux | Codice del supporti + ruote con diversi tipi di mozzi